

EFFECTS OF CAPILLARY AND GRAVITATIONAL FORCES ON OSCILLATORY FLOW AND HEAT TRANSFER IN AN OSCILLATING HEAT PIPE

WEI SHAO, YUWEN ZHANG

Department of Mechanical and Aerospace Engineering
University of Missouri, Columbia, MO 65211, USA

Phone: 001-573-884-6936, Fax: 001-573-884-5090 , E-mail address wshao@missouri.edu and zhangyu@missouri.edu.

ABSTRACT

An advanced mathematical model of flow and heat transfer in an oscillating heat pipe (OHP) is proposed. The capillary and gravitational forces are included in the momentum equation of the liquid slug. Detailed numerical simulation is carried out to investigate the surface tension and gravity effects on the oscillatory flow and heat transfer in an OHPs with different inner diameters and orientations. The results show that gravity effect hinders the performance of top heat mode OHP while aids the operation of bottom heat mode OHP. Comparisons between the cases with surface tension and without surface tension indicate that the effects of surface tension on the performance of OHP is negligible even for small inner diameter. The effect of inclination angle on the performance of OHP is investigated.

KEY WORDS: Oscillating Heat Pipe, Capillary Force, Gravity

1. INTRODUCTION

The increased demanding on high performance required by the IT industry has raised thermal design challenges due to both increased heat dissipation from the CPU and higher heat density. Local hot spot heat fluxes within the CPU are exceeding $100\text{W}/\text{cm}^2$ causing the CPU temperature rise, malfunction and failure of CPU without a very effective heat transfer device. While conventional heat sinks or spreaders become severely inadequate at these high levels of heat fluxes, Oscillating (or Pulsating) Heat Pipe (OHP or PHP) shows promise to meet the next generation CPU thermal requirements with a low profile heat sink. The OHP is a new type of two-phase heat transfer devices, invented and patented in 1990's by Akachi (1994). Due to its potential heat transport capability, fast thermal response, simple structure and low cost of construction, the OHP will play a key role in the electronics cooling.

In the last decade, extensive experimental and theoretical works have been conducted to understand the mechanism of the OHP. Dobson and Harms (1999) developed a simple mathematical model to study the behavior of an OHP with an open-end. They simply assumed the heat transfer coefficients between heated pipe wall and the vapor and neglected the effect of surface tension and heat

transfer between the liquid and its surroundings. Hosoda et al. (1999) investigated the formation of vapor plugs in a meandering closed loop heat transport device (MCL-HTD) with a simplified numerical model neglecting liquid film between the tube wall and the vapor plug and the effect of surface tension. Wong et al. (1999) presented a theoretical model of OHP operation based on the Lagrangian approach of slug flow in a serpentine tube. Zhang and Faghri (2002) analyzed thin film evaporation and condensation in the evaporator and condenser sections of an OHP with an open end. The results showed that the heat transfer in an OHP is mainly due to the exchange of sensible heat and phase-change heat transfer is the driving force of the oscillation. Liang and Ma (2004) presented a mathematical model describing the oscillation characteristics of slug flow in a capillary tube. It was demonstrated that the internal diameter, vapor plug size, and unit cell numbers determine the oscillation and capillary force, gravitational force, initial pressure distribution of the working fluid significantly affect the frequency and amplitude of oscillating motion in the capillary tube. Kiseev and Zolkin (1999) experimentally investigated the effects of acceleration and vibration on the performance of the unlooped OHP and the results indicated that the OHP operates successfully by various acceleration effects. By increasing the acceleration from $-6g$ to $+12g$ the evaporator temperature was increased by 30%. Recently, the authors extended the modeling capability by including

the effects of initial temperature, axial variation of surface temperature, and pressure drop at the bend (Shao and Zhang, 2009). It was demonstrated that the initial temperature has a very profound effect in oscillating motion and heat transfer performance.

The objective of this work is to study the effect of gravity and capillary force on the performance of an oscillating heat pipe.

2. THEORETICAL MODEL

Figure 1 shows the physical model of a U-shaped minichannel with its two ends sealed. It is considered as the building block of an OHP. The length of each evaporator section, which is located at the two ends of the pipe, is L_e and evaporator temperature is maintained at T_e . The condenser section is located between two evaporation sections with a length of L_c . The temperature of the condenser section is maintained at T_c . The length of the liquid slug is L_p , which depends on the filling ratio. The displacement of the liquid slug is represented by x_p . When the liquid slug is exactly in the middle of the U-shaped miniature channel, x_p is zero. When the liquid slug shifts to the right side, x_p is positive; when it moves to the left side x_p is negative. Once the oscillation starts, the contact angles at both ends of the liquid slug will be different, depends on the direction of liquid slug flow.

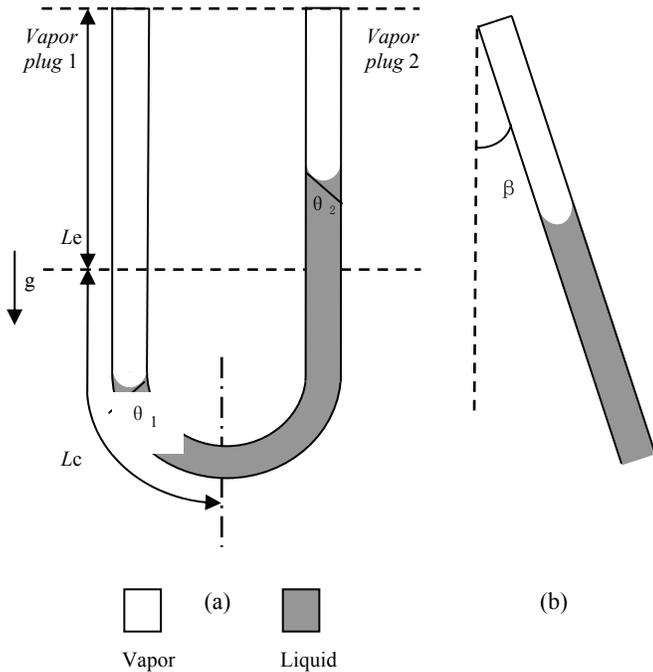


Figure 1 Physical model

If the initial value of displacement x_{p0} is positive (see Fig. 1(a)), the pressure of left vapor slug decreases condensation. Meanwhile, the right vapor plug increases due to evaporation of liquid film left behind by the liquid slug. The pressure difference between the two vapor plugs, in turn, causes the liquid slug moving to the left direction. After the displacement change its sign from positive to negative, the pressure difference will also change its sign to cause the liquid slug to move from left to right. The oscillation of the liquid slug can be sustained by alternative evaporation and condensation in the two vapor plugs. The following assumptions are made in order to model heat transfer and fluid flow in the heat pipe:

- (1) The liquid is incompressible and the vapor is saturated and behaves as an ideal gas.
- (2) Evaporative and condensation heat transfer coefficients are assumed to be constants
- (3) Shear stress at the liquid-vapor interface is negligible.
- (4) Heat conduction in the liquid slug is assumed to be one-dimensional in the axial direction and exchange of heat between the liquid and wall is considered by a convective heat transfer coefficient.
- (5) The U-shaped minichannel is assumed to be a straight pipe and the effect of pressure loss in bend is considered using an empirical correlation.

2.1 Governing Equations for Oscillatory Flow

The momentum equation for the liquid slug is:

$$AL_p\rho_l \frac{d^2x_p}{dt^2} = [(p_{l,1} - p_{l,2}) - \Delta p_b]A - 2\rho_l g \cos \beta A x_p - \pi d L_p \tau_p \quad (1)$$

where the liquid pressures are related to the vapor pressures by Laplace-Young equation:

$$p_{v1} - p_{l,1} = \frac{2}{r} \sigma_1 \cos \theta_1 \quad (2)$$

$$p_{v2} - p_{l,2} = \frac{2}{r} \sigma_2 \cos \theta_2 \quad (3)$$

The pressure difference between the two ends of the liquid slug becomes:

$$p_{l,1} - p_{l,2} = (p_{v1} - p_{v2}) - \frac{2}{r} (\sigma_1 \cos \theta_1 - \sigma_2 \cos \theta_2) \quad (4)$$

where the surface tension is function of temperature. For water, the surface tension can be expressed as:

$$\sigma_i = [75.83 - 0.1477 \times (T_{v,i} - 273.15)] \times 10^{-3} \text{ N/m} \quad (5)$$

The contact angles at two ends depend on the direction of liquid slug movement. When the liquid slug velocity is positive ($v_p > 0$), the contact angles are

$\theta_1 = \theta_{\min}, \theta_2 = \theta_{\max}$ where θ_{\min} and θ_{\max} are minimum and maximum contact angle. When the liquid slug velocity is negative ($v_p < 0$), the contact angle becomes $\theta_1 = \theta_{\max}, \theta_2 = \theta_{\min}$. The pressure loss at the bend can be found from Rohsenow et al (1985):

$$\Delta p_b = \begin{cases} K \rho_l \frac{v_p^2}{2} & v_p > 0 \\ -K \rho_l \frac{v_p^2}{2} & v_p < 0 \end{cases} \quad (6)$$

where K is the pressure loss coefficient. The effect of gravity on the motion of the liquid slug has been included in the momentum equation. Depends on the orientation of the OHP, the gravity may either assist or drag the oscillatory flow. The shear stress is obtained from $\tau_p = c_l \rho v_p^2 / 2$, where c_l is the friction coefficient that depends on the Reynolds number of liquid slug.

The energy equations of the two vapor plugs are:

$$\frac{d(m_{v1} c_v T_{v1})}{dt} = c_p T_{v1} \frac{dm_{v1}}{dt} + p_{v1} \frac{\pi}{4} d^2 \frac{dx_p}{dt} \quad (7)$$

$$\frac{d(m_{v2} c_v T_{v2})}{dt} = c_p T_{v2} \frac{dm_{v2}}{dt} - p_{v2} \frac{\pi}{4} d^2 \frac{dx_p}{dt} \quad (8)$$

The vapor plugs behave as an ideal gas, i.e.,

$$p_{v1} (L_e + x_p) \frac{\pi}{4} d^2 = m_{v1} R_g T_{v1} \quad (9)$$

$$p_{v2} (L_e - x_p) \frac{\pi}{4} d^2 = m_{v2} R_g T_{v2} \quad (10)$$

Combining the above equations, the masses and temperatures of two vapor plugs are obtained as following:

$$m_{v1} = \frac{\pi d^2 p_0}{4 R T_0} \left(\frac{p_{v1}}{p_0} \right)^{\frac{1}{\gamma}} (L_e + x_p) \quad (11)$$

$$m_{v2} = \frac{\pi d^2 p_0}{4 R T_0} \left(\frac{p_{v2}}{p_0} \right)^{\frac{1}{\gamma}} (L_e - x_p) \quad (12)$$

$$T_{v1} = T_0 \left(\frac{p_{v1}}{p_0} \right)^{\frac{\gamma-1}{\gamma}} \quad (13)$$

$$T_{v2} = T_0 \left(\frac{p_{v2}}{p_0} \right)^{\frac{\gamma-1}{\gamma}} \quad (14)$$

The initial condition of the U-shaped minichannel in this study is chosen to be identical to the reference state of this system, i.e.,

$$x_p = x_{p0}, \quad t = 0 \quad (15)$$

$$p_{v1} = p_{v2} = p_0, \quad t = 0 \quad (16)$$

$$T_{v1} = T_{v2} = T_0, \quad t = 0 \quad (17)$$

$$m_{v1} = \frac{\pi d^2 p_0}{4 R_g T_0} (L_e + x_{p0}) \quad (18)$$

$$m_{v2} = \frac{\pi d^2 p_0}{4 R_g T_0} (L_e - x_{p0}) \quad (19)$$

2.2 Latent and Sensible Heat Transfer

The evaporation and condensation heat transfer in the left and right vapor plugs is related to the mass flux due to evaporation and condensation:

$$Q_{in,v1} = \dot{m}_{evp,v1} h_{lv} \quad (20)$$

$$Q_{out,v1} = \dot{m}_{con,v1} h_{lv} \quad (21)$$

$$Q_{in,v2} = \dot{m}_{evp,v2} h_{lv} \quad (22)$$

$$Q_{out,v2} = \dot{m}_{con,v2} h_{lv} \quad (23)$$

Since the liquid slug is assumed to be incompressible, the entire liquid slug oscillates at the same velocity v_p . The temperature distribution in the liquid slug can be obtained by solving the energy equation for a liquid slug in a coordinate system that is moving with the liquid slug:

$$\frac{1}{\alpha_l} \frac{\partial T_l}{\partial t} = \frac{\partial^2 T_l}{\partial x_l^2} - \frac{h_{l,sen} \pi d}{k_l A} (T_l - T_w) \quad (24)$$

where the thermophysical properties of the liquid slug is based on the mean temperature of the liquid slug. Equation (24) is subject to the following initial and boundary conditions

$$T = T_0, t = 0, 0 < x_l < L_p \quad (25)$$

$$T = T_{v1}, x_l = 0 \quad (26)$$

$$T = T_{v2}, x_l = L_p \quad (27)$$

The wall temperature of the tube can be either T_e or T_c , depending on the displacement of the liquid slug, i.e.,

When $x_p > 0$,

$$T_w = \begin{cases} T_c, & 0 < x_l < L_p - x_p \\ T_e, & L_p - x_p < x_l < L_p \end{cases} \quad (28)$$

When $x_p < 0$,

$$T_w = \begin{cases} T_e, & 0 < x_l < |x_p| \\ T_c, & |x_p| < x_l < L_p \end{cases} \quad (29)$$

Since the Reynolds number of the liquid slug varies in a wide range that covers laminar, transition and turbulent flow, the heat transfer coefficient h of the liquid slug varies periodically. For laminar regime, ($Re = \rho_l v_p d / \mu_l < 2200$), the convective heat transfer problem is considered to be thermally developing Hagen-Poiseuille flow problem. With the effect of axial step variation of surface temperature considered, the Nusselt number is obtained using method of superposition Rohsenow et al. (1985). In contrast to the existing models in the literature that assumed constant Nusselt number, variation of Nusselt number along the length of the liquid slug is taken into consideration.

In the transition and turbulent regions, the following empirical correlations are used (Gnielinski, 1975):

$$Nu = 0.012(|Re|^{0.87} - 280) Pr_m^{0.4} \left(\frac{Pr_m}{Pr_w} \right)^{0.11} \left[1 + \left(\frac{d}{L_p} \right)^{\frac{2}{3}} \right], \quad 2200 < Re < 10000 \quad (30)$$

$$Nu = 0.0236|Re|^{0.8} Pr_m^{0.43} \left(\frac{Pr_m}{Pr_w} \right)^{0.25}, \quad |Re| > 10000 \quad (31)$$

The sensible heat transfer into and out from the liquid slug can be obtained by integrating the heat transfer over the length of the liquid slug, i.e.

$$Q_{in,s,l} = \begin{cases} \int_{L_p - x_p}^{L_p} \pi dh (T_e - T_l) dx_l, & x_p > 0 \\ \int_0^{|x_p|} \pi dh (T_e - T_l) dx_l, & x_p < 0 \end{cases} \quad (32)$$

$$Q_{out,s,l} = \begin{cases} \int_0^{-x_p} \pi dh (T_l - T_c) dx_l, & x_p > 0 \\ \int_{|x_p|}^{L_p} \pi dh (T_l - T_c) dx_l, & x_p < 0 \end{cases} \quad (33)$$

where the sensible heat transfer coefficient can be obtained from $h = Nuk_l / d$

The sensible heat transfer into and out from the liquid slug can be obtained by integrating the heat transfer over the length of the liquid slug (Kays et al., 2005).

3. NUMERICAL SOLUTION

The governing equations in the above physical model can be solved numerically. An explicit finite difference scheme is employed to solve the governing equations of the liquid slug and vapor plug. An implicit scheme with uniform grid Patankar (1980) is employed to solve transient heat transfer in the liquid slug. The total number of grids chosen for the liquid slug is 300 and doubling the number of grids does not change the results. The results of each time-step can be obtained by following the numerical procedure outlined below:

- 1) Assume the temperatures of the two vapor plugs T_{v1} and T_{v2} , and calculate thermal and physical properties of liquid according to T_l
- 2) Solve for vapor pressures, p_{v1} and p_{v2} , from eqs. (9) and (10).
- 3) Solve for x_p from eqs. (1) and (6).
- 4) Obtain the new masses of the two vapor plugs m_{v1} and m_{v2} , by accounting for the change of vapor masses from eqs. (11) and (12).
- 5) Calculate the pressure of the two vapor plugs, p_{v1} and p_{v2} , from eqs. (9) and (10).
- 6) Solve for T_{v1} and T_{v2} from eqs. (13) and (14).


- 7) Compare T_{v1} and T_{v2} obtained in Step 6 with assumed values in step 1. If the differences meet the small tolerance, then go to the step 8; otherwise, the above procedure is repeated until a converged solution is obtained.
- 8) Obtain heat transfer coefficient through eqs. (30) to (31).
- 9) Solve for liquid temperature distribution from eq. (24) and calculate Q_s .
- 10) Use eqs. (20) and (23) to calculate Q_{latent}

After the time-step independent test, it was found that the time-step independent solution of the problem can be obtained when time-step is $\Delta t = 1 \times 10^{-4}$, which is used in all numerical simulations.


4. RESULTS AND DISCUSSION

The parameters of the miniature channel are: $L_e = 0.1$ m, $L_c = 0.2$ m, $L_p = 0.2$, $d = 0.001$ m, $T_e = 123.4$ °C, $T_c = 20$ °C. The initial pressures of the vapor plugs are $p_{v0} = 31164.64$ Pa and the initial temperature of the vapor plug is $T_{v0} = 70$ °C. The heat transfer coefficient at the heating and cooling sections are $h_e = h_c = 200$ W/m²-K. The maximum and minimum contact angles, θ_{max} and θ_{min} , between water and copper wall are 85° and 33°, respectively. Unless stated otherwise, the above conditions remain the same for each case.


Figure 2(a) shows the comparison of liquid slug displacements for the cases with and without surface tension with $\beta = 90^\circ$ and $d=0.001$ mm. As can be seen, there is no apparent difference between the displacements for the cases with and without surface tension since the capillary force is relatively small compared with the vapor pressure difference. Figure 2(b) shows the comparison of left vapor plug temperatures for the cases with and without surface tension. Similar to the trend on liquid slug displacement, there is no effect from surface tension. The comparison of the pressure variations of the left vapor plug for the cases with and without surface tension is shown in Fig. 2 (c). Once again, the vapor plug pressures exhibited the similar trend as the vapor plug temperatures. Therefore, one can conclude that capillary force has little effect on the oscillatory flow and heat transfer of an OHP. Although the capillary force is the necessary for the formation of liquid slug, the performance of the OHP is not affected by the surface tension. The effect of capillary force on the heat transfer was also computed and no noticeable effect was observed.

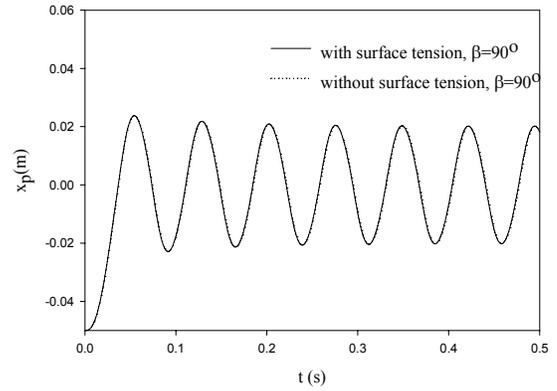

(a) Displacement of liquid slug

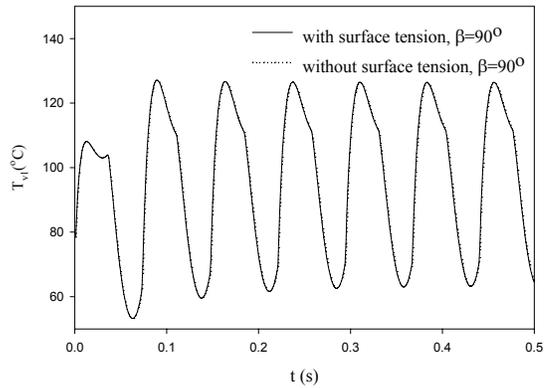

(b) Vapor plug temperatures

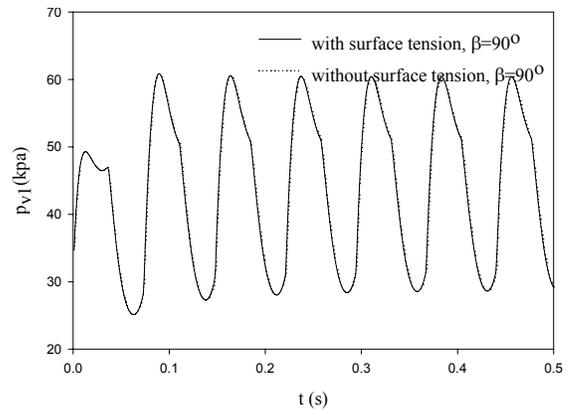

(c) Vapor plug pressure


Figure 2 Comparison of with surface tension and without surface tension at $\beta = 90^\circ$

Figure 3(a) shows the comparison of the displacement of liquid slug for five potential orientations (see Fig. 1(b)):


- (1) $\beta = 0^\circ$ (evaporator above condenser)
- (2) $\beta = 45^\circ$ (evaporator above condenser)
- (3) $\beta = 90^\circ$ (horizontally)
- (4) $\beta = 135^\circ$ (condenser above evaporator)
- (5) $\beta = 180^\circ$ (condenser above evaporator)

As β increases from 0° to 180° , the gravitational acceleration decreases from $+g$ to $-g$. As can be seen from this comparison, at other condition being equal, there are an increase of the amplitude and a decrease of the frequency of the oscillation when β increases. The change of amplitude of the liquid slug displacement is so small but the phase is much more delayed as β increases. The frequency of oscillation for the case of $\beta = 180^\circ$ is decreased compared with that of the case with $\beta = 0^\circ$. Figure 3 (b) shows the comparison of left vapor plug temperatures in five different orientations. Similar to the trend on liquid slug displacement, there is a delay in the phase of the vapor temperature with increasing β . The frequency of the temperature oscillation is decreased as β increases. Comparison of the pressure variations of the left vapor plug for five different orientation angles is shown in Fig. 3 (c). It can be seen that the vapor plug pressures in five different orientations exhibited the similar trend as the vapor plug temperatures. Therefore, one can conclude that as β increases, the frequencies of displacement, vapor plug temperature and pressure decrease, while the amplitude slightly increases.


Fig. 4 (a) shows the comparison of sensible heat transfer transferred into the liquid for five orientations. There is a delay of the phase and a slight increase of the of sensible heat transfer in and out of the liquid as β increases. Due to enhanced oscillatory motion of the liquid slug, the average sensible heat transfer rate is increased from 10.95W with $\beta=0^\circ$ to 11.64W with $\beta=180^\circ$ – a 6.3% increase. The comparison of latent heat transfer for five different orientations is shown in Fig. 4(b). It is seen that the delay of the phase of the oscillation also results the delay of the phase of evaporation heat transfer but the amplitude of evaporation heat transfer does not increase much. Due to gravity effect, the average evaporation heat transfer increases from 0.49W to 0.50W – a 2% increase. Thus, the effect of gravitational force on the performance of the OHP is very insignificant.

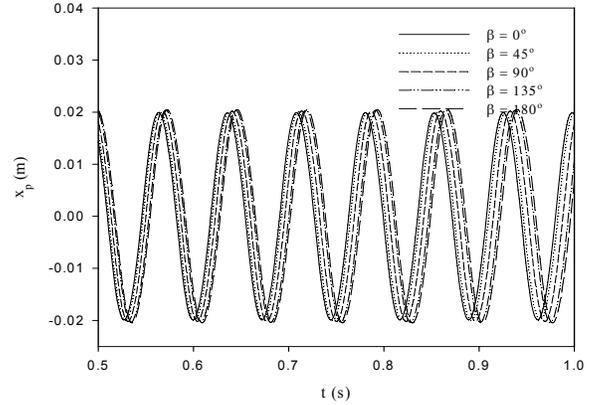

(a) Displacement of liquid slug

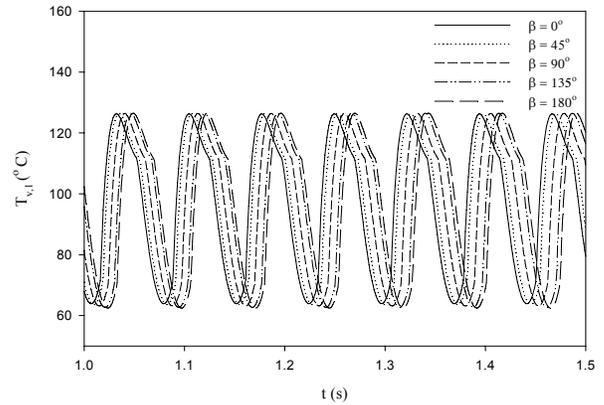


(b) Vapor plug temperatures

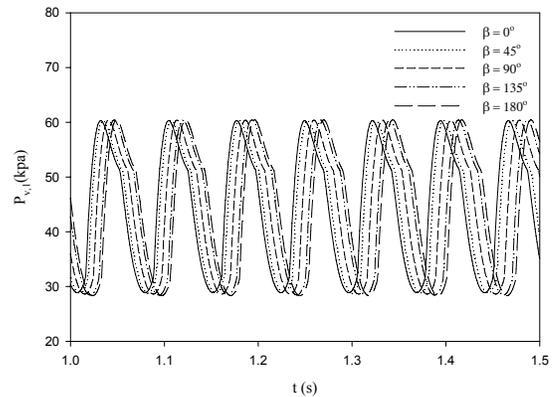


(c) Vapor plug pressure

Figure 3 Comparison of the oscillations of different inclination angles

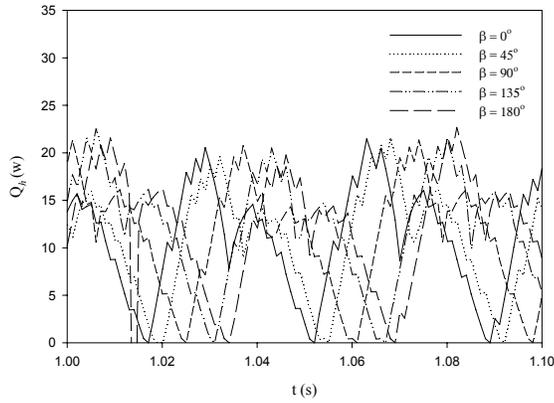


(a) Sensible heat transfer

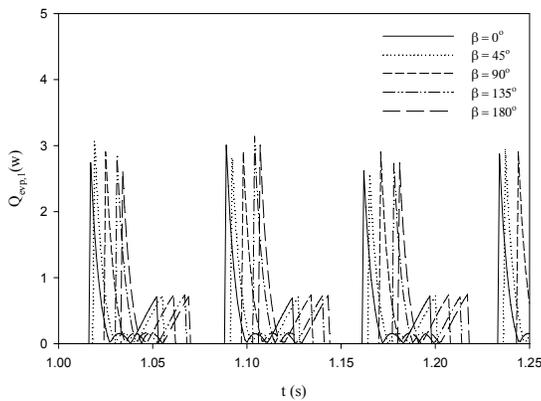


(b) Latent heat transfer


Figure 4 Comparison of heat transfer of different inclination angles

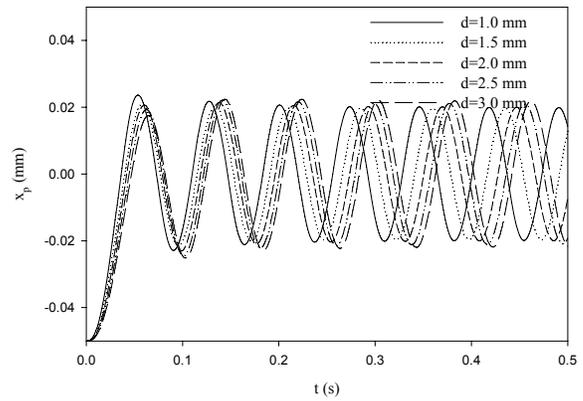

(a) Displacement of liquid slug

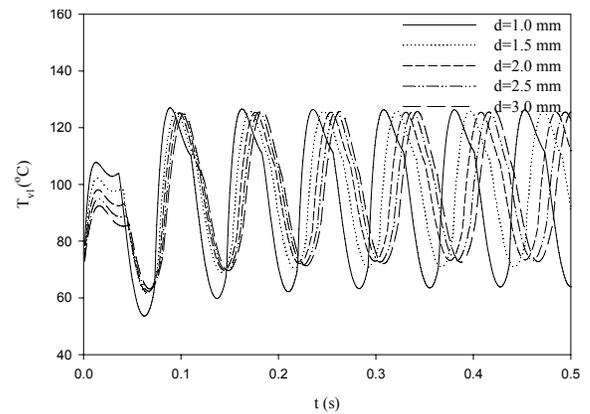


(b) Vapor plug temperatures

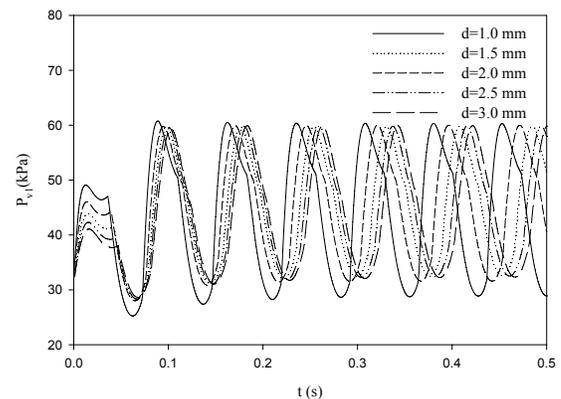


(c) Vapor plug pressure

Figure 5 Comparison of the oscillations for different inner diameters

The effect of diameter on the performance of OHP is studied next. Figure 5(a) shows the comparison of the displacement for the cases of five different diameters. As can be seen, at other condition being equal, there are an apparent decrease of the amplitude and a increase of the frequency of the oscillation when the inner diameter decreases together. It can be seen that, the change of amplitude of the liquid slug displacement is apparent and the phase is much more advanced. The amplitude of oscillation for the cases with $d = 0.001$ mm is decreased compared with that of the case with $d = 0.003$ m. Figure 5(b) shows the comparison of left vapor plug temperatures for five different diameters. With increasing diameter, the amplitude of temperature oscillation decreases and the phase of oscillation advances. Figure 5(c) shows the comparison of the pressure variations of the left vapor plug in five different diameters. The vapor plug pressures in five different orientations exhibited the similar trend as the vapor plug temperatures.

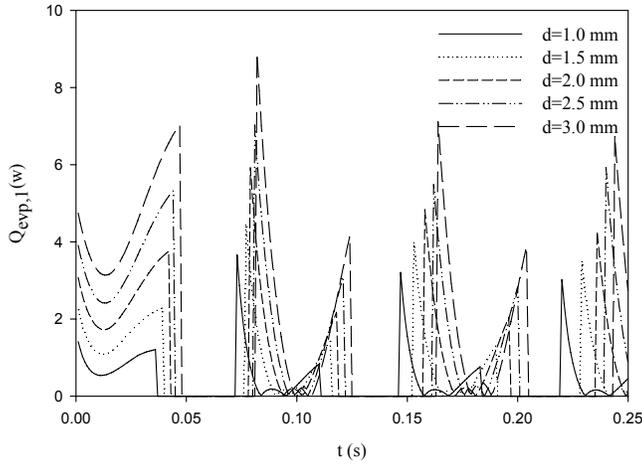

(a) Sensible heat transfer

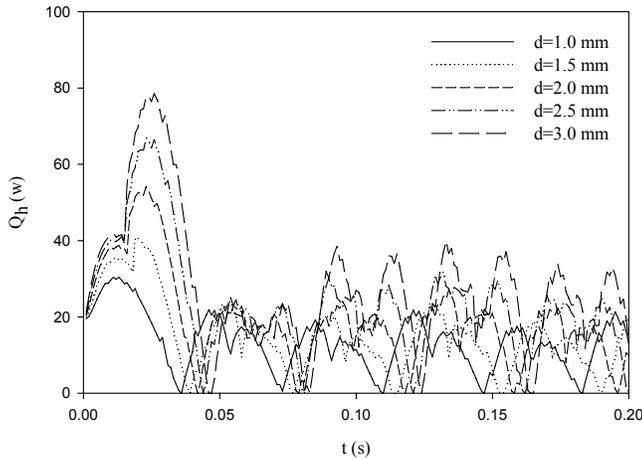

(b) Latent heat transfer

Figure 6 Comparison of heat transfer for different inner diameters

Figure 6(a) shows the comparison of latent heat transfer for different inner diameters. The latent heat transfer increases as the inner diameter increases. Figure 6(b) shows the comparison of the sensible heat transfer for different inner diameters of OHP. There is an increase of the sensible heat transfer when the inner diameter increases. Although increasing the inner diameter can enhance the heat transfer, the inner diameter must be small enough to ensure formation of liquid slugs in the OHP.

5. CONCLUSIONS

Capillary and gravitational effects on oscillatory flow and heat transfer of an oscillating heat pipe are fully investigated by comparing displacement of liquid slug, temperature and pressure of vapor plugs, as well as latent and sensible heat transfer. It is concluded that the effect of surface tension on the oscillation can be neglected. The gravitational force has more effect on the frequency of the oscillation than the amplitude. The bottom-heating mode operates most effectively. As the inner diameter of the OHP increases, the heat transfer capability is improved.

NOMENCLATURE

A	area, m^2
c_p	specific heat at constant pressure, $J/kg\cdot K$
c_v	specific heat at constant volume, $J/kg\cdot K$
d	diameter of the miniature channel, m
h_c	condensation heat transfer coefficient, $W/m^2\cdot K$
h_e	evaporation heat transfer coefficient, $W/m^2\cdot K$
h_{lv}	latent heat, J/kg
K	loss coefficient
k	thermal conductivity, W/m
L	length, m
m	mass of vapor plugs, kg
r	radius of the tube, m
p	vapor pressure, Pa
$q_{p,con}$	condensation heat transfer on a single particle, W
$q_{p,eva}$	evaporation heat transfer on a single particle, W
$Q_{con,p}$	total condensation heat transfer, W
$Q_{eva,p}$	total evaporation heat transfer, W
$Q_{in,s,l}$	sensible heat transfer into the liquid slug, W
$Q_{out,s,l}$	sensible heat transfer from the liquid slug, W
R	gas constant, $J/kg\cdot K$
t	time, s
T	temperature, K
x_p	displacement of the liquid slug, m
<i>Greek symbols</i>	
α	thermal diffusivity, m^2/s
β	inclination angle, degree
θ	contact angle, degree
γ	ratio of specific heat
ν	kinematic viscosity, m^2/s

ρ	density, kg/m ³
σ	surface tension, N/m
τ	shear stress, N/m ²

Subscripts

0	initial condition
1	left vapor plug
2	right vapor plug
<i>c</i>	condenser
<i>e</i>	evaporator
<i>l</i>	liquid
<i>p</i>	plug
<i>v</i>	vapor
<i>w</i>	the wall of the tube

REFERENCES

1. Akachi, H., Looped Capillary Heat Pipes, Japanese Patent, No. Hei697147, 1994
2. Dobson, R.T., and Harms, T.M., Lumped Parameter Analysis of Closed and Open Oscillatory Heat Pipe, *Proceedings of the 11th International Heat Pipe Conference*, Tokyo, Japan, 1999, pp. 137-142
3. Gnielinski, V., 1975, Neue Gleichungen für den Wärme- und den Stoffübergang in turbulent durchströmten Rohren und Kanälen, *Forschung im Ingenieurwesen*, Vol. 41, No. 1, pp. 8-16
4. Hosoda, M., Nishio, S., and Shirakashi, R., Meandering closed-loop heat-transfer tube (propagation phenomena of vapor plug), *Proceedings of the 5th ASME/JSME Joint Thermal Engineering Conference*, March 15-19, San Diego, CA, 1999.
5. Kays, W.M., Crawford, M.E., and Weigand, B., *Convective Heat Transfer*, 4th ed., McGraw-Hill, New York, 2005, Chap. 8.
6. Kiseev, V.M., and Zolkin, K.A., 1999, The Influence of Acceleration on the Performance of Oscillating Heat Pipe, *Proceedings of 11th International Heat Pipe Conference*, Tokyo, Japan, pp. 154-158.
7. Liang, S.B. and Ma, H.B., Oscillating motions of slug flow in capillary tubes, *International Comm. Heat and Mass Transfer*, Vol. 31, No. 3, 2004, pp. 365-375
8. Patankar, S.V., *Numerical Heat Transfer and Fluid Flow*, Hemisphere, New York, 1980, Chap. 2
9. Rohsenow, W.M., Hartnett, J.P. and Ganic, E.N., *Handbook of Heat Transfer Fundamentals*, 2nd ed., McGraw-Hill, New York, 1985, Chap. 7
10. Shao, W., and Zhang, Y., "Thermally-Induced Oscillatory Flow and Heat Transfer in a U-Shaped Minichannel," 41st AIAA Thermophysics Conference, San Antonio, TX, June 22-25, 2009.
11. Wong, T.N., Tong, B.Y., Lim, S.M., Ooi, K.T., Theoretical modeling of pulsating heat pipe, *Proceedings of the 11th International Heat Pipe Conference*, Tokyo, Japan, 1999
12. Zhang, Y., and Faghri, A., Heat transfer in a pulsating heat pipe with open end, *International Journal of Heat and Mass Transfer*, Vol. 45, No. 18, 2002, pp. 2501-2508